

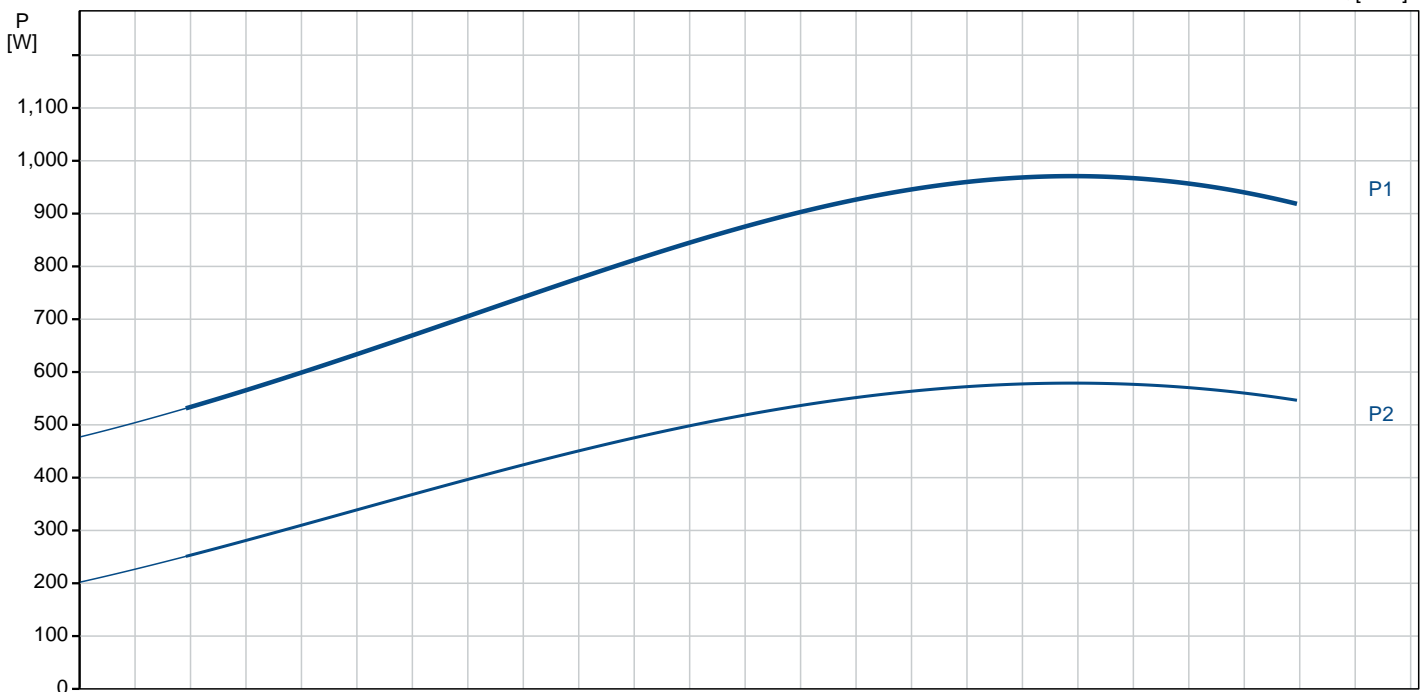
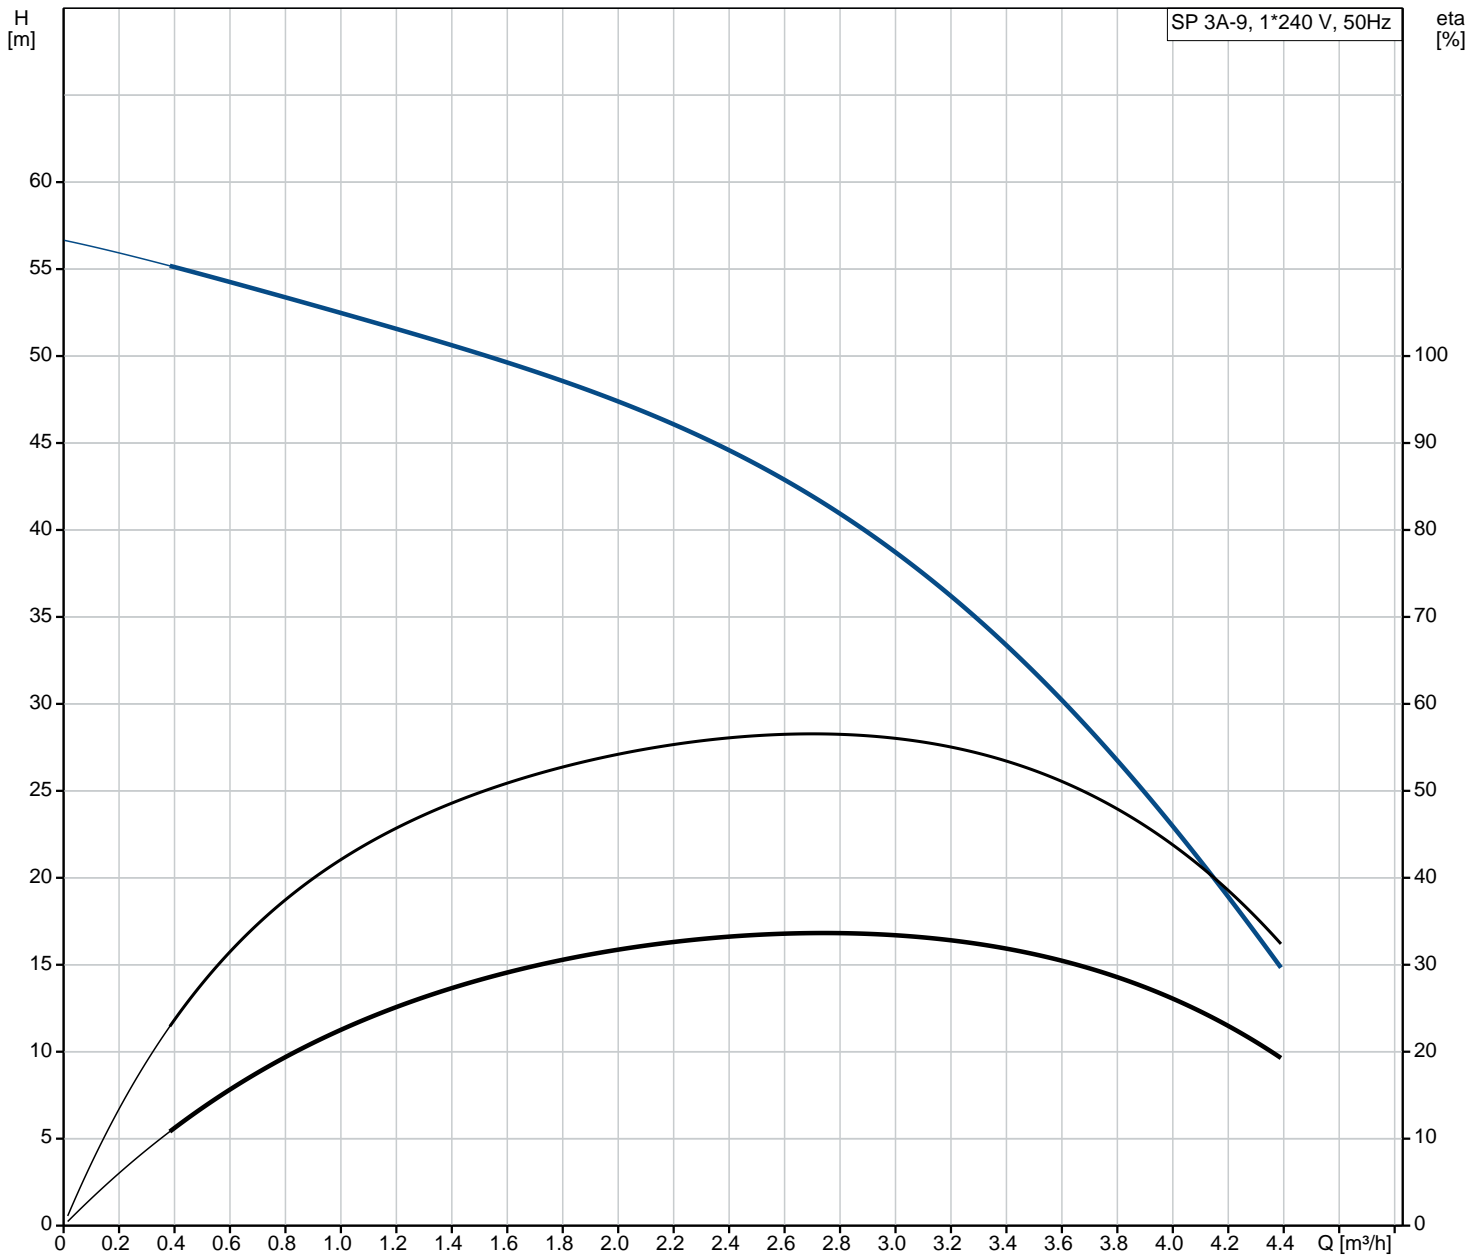



10002E09 SP 3A-9 50 Hz

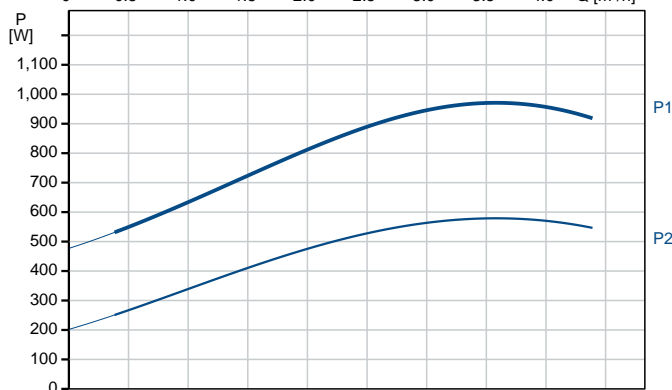

Description	Value
General information:	
Product name:	SP 3A-9
Product No:	10002E09
EAN number:	5700391124754
Technical:	
Speed for pump data:	2900 rpm
Rated flow:	3 m ³ /h
Rated head:	40 m
Stages:	9
Shaft seal for motor:	LIPSEAL
Approvals on nameplate:	CE,EAC
Curve tolerance:	ISO9906:2012 3B
Model:	A
Valve:	pump with built-in non-return valve
Motor version:	T40
Materials:	
Pump:	Stainless steel EN 1.4301
Impeller:	Stainless steel EN 1.4301
Motor:	Stainless steel DIN W.-Nr. 1.4301 AISI 304
Installation:	
Pump outlet:	Rp1 1/4
Motor diameter:	4 inch
Liquid:	
Pumped liquid:	Water
Maximum liquid temperature:	40 °C
Max liquid t at 0.15 m/sec:	40 °C
Liquid temperature during operation:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Motor type:	MS402
Type of motor:	CSIR
Applic. motor:	NEMA
Rated power - P2:	0.55 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 240 V
Rated current:	5.5 A
Starting current:	400 %
Cos phi - power factor:	0,74
Rated speed:	2860 rpm
Start. method:	direct-on-line
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	B
Motor protec:	CONTACT
Thermal protec:	internal
Built-in temp. transmitter:	no
Motor No:	79243103
Others:	
Minimum efficiency index, MEI :	0.70
ErP status:	EuP Standalone/Prod.
Net weight:	11.9 kg
Gross weight:	13.7 kg
Shipping volume:	12 m ³
Country of origin:	GB
Custom tariff no.:	84137029

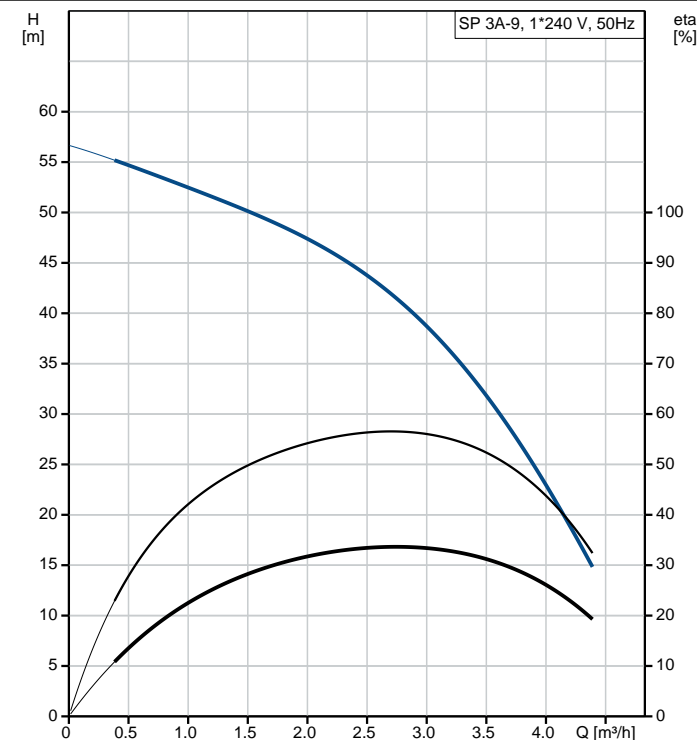

10002E09 SP 3A-9 50 Hz

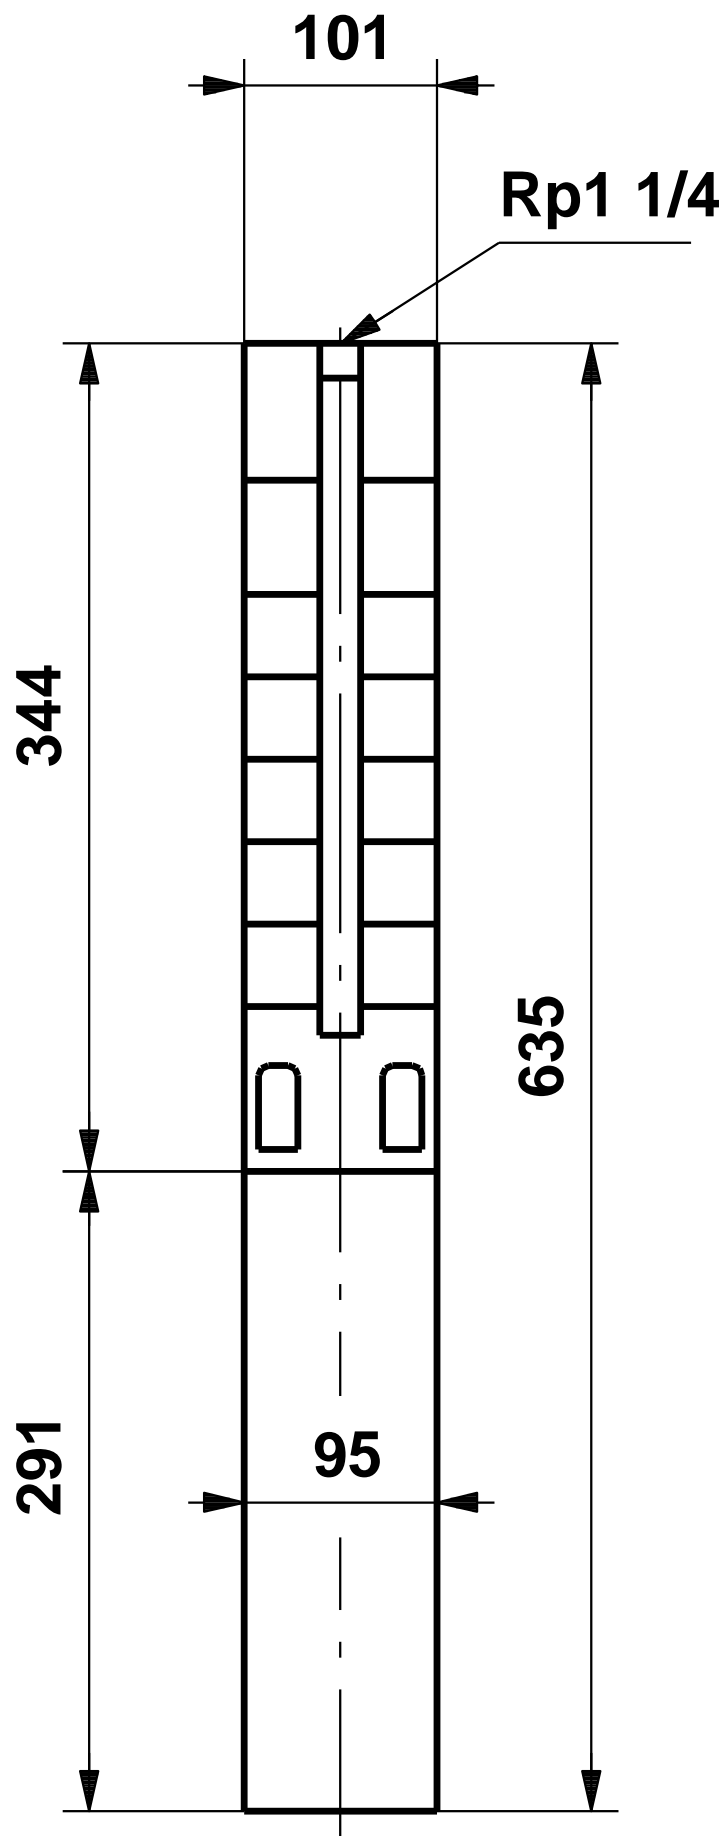

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.