

Schematic representation: Dry installation for Filter and Watercourse pump Aquamax Dry 14000 (PRO) with concurrent operation of skimmer and satellite filter

AQUAMAX DRY

Filter pump especially designed for dry installation



- The pump is installed below the water surface level
- Extremely quiet in operation
- Asynchronous motor technology with flow-optimised impeller
- Coarse pollutant displacement of particles up to 8 mm in size
- Extremely stable thanks to its solid base
- Delivered with 2 connection elements for hoses from 1" to 1 1/2" and two supplemental stainless steel hose clamps 1 1/2"
- Suitable for use in swim ponds and bathing ponds (used in exterior pump chamber)

Product details



Coarse debris displacement


The pump displaces debris particles up to 8 mm in size, such as fish waste or dead plant remains.



Hose clamps

The stainless steel hose clamps 1 1/2" are included in the scope of delivery.

Aquamax Dry 6000 – 16000

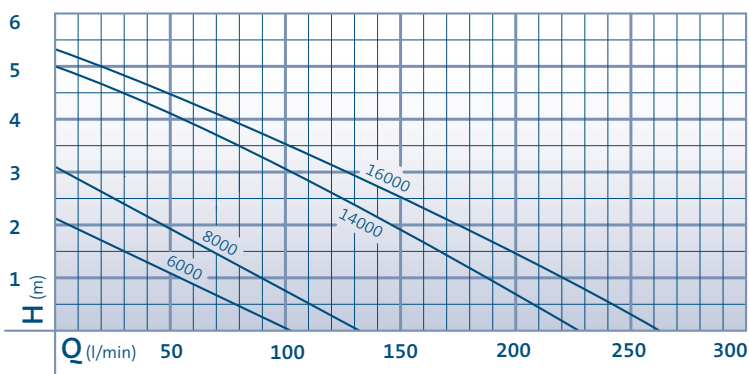

Technical data

Matching filters and filter systems starting on p. 88

	Aquamax Dry 6000	Aquamax Dry 8000	Aquamax Dry 14000	Aquamax Dry 16000
Dimensions (L x W x H) mm	200 x 150 x 150		210 x 150 x 170	
Rated voltage	220 – 240V/50 Hz			
Power consumption W	75	100	230	260
Power cable length m	10.00			
Net weight kg	3.10	3.16	5.02	
Guarantee (+ request guarantee) years	3 + 2			
Max. flow rate l/min	100	125	225	251
Max. flow rate l/h	6,000	7,500	13,500	15,100
Max. head height m	2.20	3.00	5.00	5.20
Connection, pressure-side	1 1/2"			
Connection, suction-side	1 1/2"			
Connection for hoses	1", 1 1/4", 1 1/2"			
Electronic adjustment	yes			
Set-up type	dry installation only			
Item no. (GB-Version)	50396	50069	50070	50448
Item no.	50393	50066	50068	GB-Version only!



Extras

Top 3 sales arguments

- Quiet pump, especially for dry installation
- Extremely stable thanks to its solid base
- Electronically adjustable with the OASE InScenio FM-Master 3

Recommendation

For trouble-free pump operation connection of a satellite filter or skimmer on the suction side is recommended. Comply with the accessory recommendations.

The Aquamax Dry 14000 is recommended for concurrent operation of skimmer and satellite filter.

Accessories

Satellite filter

Enables intake of polluted water from an additional point on the pond floor.

Item no. 57177



AquaSkim 40

Effectively frees the pond surface from leaves, food remnants, and other pollutants, and conveys pollutants directly to the filter system.

Item no. 56907 (p. 124)



InScenio FM-Master 3

Garden power outlet for electronic adjustment.

Item no. 36311 (p. 154)

Item no. 56473 (GB-Version / p. 154)



Y-distributor 1 1/2"

Water distributor with 1 inlet and 2 outlets. Both outlets are individually adjustable.

Please operate underwater only!

Item no. 56668 (p. 169)

