

Schematic representation: Connection possibilities with the InScenio OASE garden outlets

# INSCENIO

Flexible & decorative power management

*Cover in sandstone-effect*  
InScenio Rock cover in stone decor elegantly conceals the technical unit. (optional accessory)



↓

*Splash guard*  
For your safety the InScenio cover protects the electronic components from splashing water.



↓

*Main module*  
Example InScenio FM-Master 3 offers four power outlets of which two can be switched on and off. One input offers permanent power and a dim function.



*Remote control*  
From a range of up to 80 metres all functions can be easily and conveniently activated.



- Intelligent modular system
- Simple to install and simple to extend later, even if you are not an electrician
- Installation requires no digging whatsoever for maximum flexibility
- Ground stake guarantees secure anchoring
- Spray water resistant and strain-relieved outlets for year-round use
- Ideal for subsequent ring cabling in the garden

**From InScenio FM-Master 1**

- Remote control range of the FM-Master to max. 80 m if there is no transmission interference.

## Product details



**Strain relieved installation**  
Strain-relieved outlets for safe year-round use.



**Splash guard**  
In a safe place: The InScenio cover protects the electronic parts from splashing water. With the optional InScenio Rock cover the InScenio can be perfectly integrated in the garden world.



**Ground stake**  
Installation requires no digging whatsoever for maximum flexibility and safe anchoring, thank to the provided ground stake.



**Remote control**  
The remote control unit of the FM 1 included in the scope of delivery has a range of up to 25 m, the remote control unit of the FM-Master and FM-ProfiMaster has a range of up to 80 m (if there is no transmission interference).

## Extras

### Top 3 sales arguments


- Flexible modular system
- Easy installation, can also be retro-actively extended
- Spray water resistant, strain relieved

### Accessories

**InScenio Rock**  
Cover in rock-effect suitable for all InScenio FM-Master housings.  
Item no. 50417 (page 186)



## Technical data

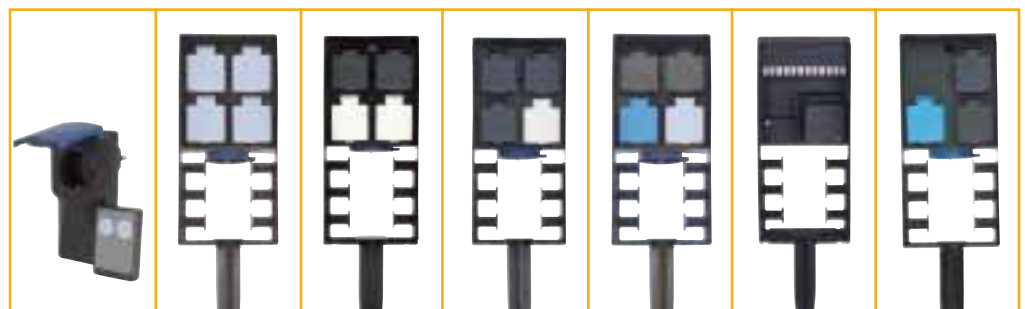

	InScenio FM 1	InScenio 230	InScenio FM-Master 1	InScenio FM-Master 2	InScenio FM-Master 3	InScenio FM-Master 3 GB *1)	InScenio FM-ProfiMaster
Dimensions (L x W x H)	mm 80 x 60 x 125	215 x 155 x 295					
Rated voltage	230V/50 Hz	220–240V/50 Hz					
Max. total load power	W 400	3,600					
Max. total load current	A 1.7	16					
Net weight	kg 0.28	1.42	1.50	1.74	1.80		1.86
Guarantee	years 3	2				3	
Hand-held transmitter/range max.	m 25.00	–	80.00				–
Permanent power outlets	unit –	4 x 230V	2 x 220–240V	1 x 220–240V			–
Number of power outlets on/off, max. 2000W	unit –	–	2 x 220–240V	3 x 220–240V	2 x 220–240V		
Power outlets, dimmable	unit max. 40–400 W	–			1 x max. 40–320 W		1 x max. 1,250 W***
Item no. (GB-Version)	Not available in GB !					56473	Not available in GB !
Item no.	36832	55433	54978	36310	36311	–	56886



\* InScenio FM 1 and FM-ProfiMaster

\*\* Except InScenio FM 1

\*\*\* Max. 1 pump connection

\*1) It is not possible to use Lunaqua lightning with the dimmer function (InScenio FM-Master 3 / GB-Version)