

Hunter®





Hunter I-25 rotors cover more distance and larger radius. Efficient, tough, and built to last.

I-25 Performance Rotor More Distance, Larger Radius


The I-25 gets the job done while keeping your wallet at ease. This rotor covers more distance, hitting a radius of 12.2 to 21.6 m. The compact and built-to-last construction comes with an optional stainless steel riser for tough-as-nails strength. With a 5-year warranty, the I-25 has options for reclaimed water ID and high-speed. A standard check valve is built in, and a wide selection of high performance nozzles is available.



Color-coded nozzles ensure full coverage performance.



Easy arc adjustment right from the top.

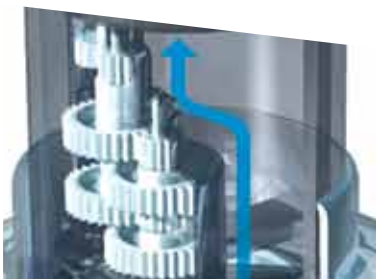

Proven and tested water-lubricated gear drive system.



Reclaimed option available.



The perfect rotor for commercial and recreational sites.



EASY IDENTIFICATION

Nozzles are color-coded. Each standard nozzle has a number engraved on the outer surface. The numbers tell you the approximate nozzle flowrate.

TWO NOZZLES IN ONE UNIT. CHANGING BOTH IS A SNAP.

We've combined two different nozzles, each with its own function, in one color-coded single unit. Replace both nozzles with one simple modification. Just snap one out, snap another in, and both primary and secondary nozzles are changed.

CHOICE. VERSATILITY.

PERFORMANCE.

Twelve different nozzles handle any radius from 12.2 m to 21.6 m plus any flow rate from 14.4 to 119 l/min (0.86 to 7.15 m³/hr). More choices to meet your specific needs.



Easy arc adjustment (50°–360°):
Up, down, wet or dry with through-the-top convenience, non-reversing.

Automatic arc return: returns to the original arc regardless of where the turret is turned.













Non-strippable, vandal-proof drive mechanism enables the turret to be turned without causing damage.













100% Adjustable: Full and part circle operation in a single rotor.

Available in plastic or stainless steel riser.

Available in 10 cm (4") or 15 cm (6") pop up.

Charts and Specs

I-25 Nozzle Performance Data – Metric						
Nozzle	Pressure Bars	Pressure kPa	Radius m	Flow m ³ /hr	Flow l/min	Precip mm/hr
 4 Yellow	2.5	248	11.9	0.82	13.6	12 13
	3.0	303	12.2	0.91	15.2	12 14
	3.5	352	12.5	0.98	16.4	13 15
	4.0	400	12.5	1.05	17.5	13 16
	4.5	448	12.8	1.11	18.6	14 16
5.0	496	13.1	1.18	19.6	14 16	
 5 White	2.5	248	12.8	0.95	15.9	12 13
	3.0	303	13.1	1.04	17.3	12 14
	3.5	352	13.4	1.11	18.5	12 14
	4.0	400	13.4	1.17	19.6	13 15
	4.5	448	13.7	1.24	20.6	13 15
5.0	496	14.0	1.29	21.5	13 15	
 7 Orange*	2.5	248	13.4	1.44	24.0	16 19
	3.0	303	14.0	1.54	25.6	16 18
	3.5	352	14.3	1.61	26.9	16 18
	4.0	400	14.3	1.68	28.0	16 19
	4.5	448	14.6	1.75	29.1	16 19
5.0	496	14.9	1.81	30.1	16 19	
 8 Lt. Brown	2.5	248	14.0	1.65	27.5	17 19
	3.0	303	14.3	1.81	30.1	18 20
	3.5	352	14.9	1.94	32.3	17 20
	4.0	400	15.2	2.05	34.2	18 20
	4.5	448	15.2	2.16	36.0	19 22
5.0	496	15.5	2.27	37.8	19 22	
 10 Lt. Green*	3.0	303	15.2	2.15	35.8	18 21
	3.5	352	15.5	2.32	38.6	19 22
	4.0	400	15.8	2.48	41.3	20 23
	4.5	448	16.2	2.63	43.9	20 23
	5.0	496	16.2	2.78	46.3	21 25
5.5	552	16.5	2.94	48.9	22 25	
 13 Lt. Blue	3.0	303	15.8	2.38	39.6	19 22
	3.5	352	16.2	2.57	42.8	20 23
	4.0	400	16.5	2.75	45.7	20 23
	4.5	448	16.5	2.91	48.5	21 25
	5.0	496	16.8	3.07	51.2	22 25
5.5	552	16.8	3.24	54.0	23 27	
 15 Gray*	3.0	303	16.8	2.86	47.7	20 24
	3.5	352	17.1	3.05	50.8	21 24
	4.0	400	17.4	3.22	53.7	21 25
	4.5	448	17.4	3.38	56.3	22 26
	5.0	496	17.4	3.53	58.8	23 27
5.5	552	17.7	3.69	61.5	24 27	
 18 Red	3.0	303	17.4	3.08	51.4	20 24
	3.5	352	17.7	3.31	55.2	21 24
	4.0	400	18.0	3.52	58.7	22 25
	4.5	448	18.3	3.72	62.0	22 26
	5.0	496	18.9	3.91	65.2	22 25
5.5	552	19.2	4.11	68.5	22 26	
 20 Dk. Brown*	4.0	400	18.6	3.97	66.2	23 27
	4.5	448	18.9	4.20	70.1	24 27
	5.0	496	19.2	4.42	73.7	24 28
	5.5	552	19.5	4.66	77.7	25 28
	6.0	600	19.8	4.86	81.0	25 29
6.5	648	20.1	5.05	84.2	25 29	
 23 Dk. Green	4.0	400	19.2	4.88	81.3	26 31
	4.5	448	19.5	5.18	86.3	27 31
	5.0	496	19.8	5.47	91.1	28 32
	5.5	552	20.1	5.78	96.3	29 33
	6.0	600	20.1	6.04	100.6	30 34
6.5	648	20.4	6.29	104.8	30 35	
 25 Dk. Blue*	4.0	400	19.8	5.23	87.1	27 31
	4.5	448	20.1	5.58	93.1	28 32
	5.0	496	20.4	5.92	98.7	28 33
	5.5	552	21.0	6.29	104.9	28 33
	6.0	600	21.0	6.60	110.0	30 34
6.5	648	21.3	6.90	115.1	30 35	
 28 Black	4.5	448	20.1	5.93	98.8	29 34
	5.0	496	20.7	6.21	103.5	29 33
	5.5	552	21.3	6.52	108.6	29 33
	6.0	600	21.3	6.77	112.8	30 34
	6.5	648	21.6	7.01	116.9	30 35
7.0	696	21.6	7.24	120.7	31 36	


I-25 High-Speed Nozzle Performance Data – Metric						
Nozzle	Pressure Bars	Pressure kPa	Radius m	Flow m ³ /hr	Flow l/min	Precip mm/hr
 4 Yellow	2.5	248	11.0	0.81	13.6	14 16
	3.0	303	11.3	0.91	15.1	14 16
	3.5	352	11.6	0.99	16.4	15 17
	4.0	400	11.6	1.06	17.6	16 18
	4.5	448	11.6	1.13	18.8	17 19
5.0	496	11.9	1.19	19.9	17 19	
 5 White	2.5	248	11.3	0.93	15.5	15 17
	3.0	303	11.6	1.04	17.3	16 18
	3.5	352	11.9	1.13	18.9	16 18
	4.0	400	12.2	1.22	20.3	16 19
	4.5	448	12.2	1.30	21.6	17 20
5.0	496	12.5	1.38	22.9	18 20	
 7 Orange*	2.5	248	11.9	1.32	22.0	19 22
	3.0	303	12.2	1.46	24.3	20 23
	3.5	352	12.5	1.57	26.2	20 23
	4.0	400	12.8	1.68	27.9	20 24
	4.5	448	13.1	1.78	29.6	21 24
5.0	496	13.4	1.87	31.1	21 24	
 8 Lt. Brown	2.5	248	12.5	1.54	25.7	20 23
	3.0	303	12.8	1.72	28.6	21 24
	3.5	352	13.1	1.86	31.0	22 25
	4.0	400	13.4	2.00	33.3	22 26
	4.5	448	13.4	2.13	35.4	24 27
5.0	496	13.7	2.25	37.5	24 28	
 10 Lt. Green*	3.0	303	13.7	2.15	35.8	23 26
	3.5	352	14.0	2.32	38.6	24 27
	4.0	400	14.3	2.48	41.3	24 28
	4.5	448	14.6	2.63	43.9	25 28
	5.0	496	14.9	2.78	46.3	25 29
5.5	552	15.2	2.94	48.9	25 29	
 13 Lt. Blue	3.0	303	14.3	2.38	39.6	23 27
	3.5	352	14.6	2.57	42.8	24 28
	4.0	400	14.9	2.75	45.7	25 28
	4.5	448	15.2	2.91	48.5	25 29
	5.0	496	15.5	3.07	51.2	25 29
5.5	552	15.5	3.24	54.0	27 31	
 15 Gray*	3.0	303	14.6	2.86	47.7	27 31
	3.5	352	14.9	3.05	50.8	27 32
	4.0	400	15.2	3.22	53.7	28 32
	4.5	448	15.5	3.38	56.3	28 32
	5.0	496	16.2	3.53	58.8	27 31
5.5	552	16.5	3.69	61.5	27 31	
 18 Red	3.0	303	14.9	3.08	51.4	28 32
	3.5	352	15.2	3.31	55.2	29 33
	4.0	400	15.5	3.52	58.7	29 34
	4.5	448	16.2	3.72	62.0	29 33
	5.0	496	16.8	3.91	65.2	28 32
5.5	552	17.4	4.11	68.5	27 31	
 20 Dk. Brown*	4.0	400	16.2	3.97	66.2	30 35
	4.5	448	16.5	4.20	70.1	31 36
	5.0	496	17.1	4.42	73.7	30 35
	5.5	552	17.7	4.66	77.7	30 34
	6.0	600	17.7	4.86	81.0	31 36
6.5	648	18.0	5.05	84.2	31 36	
 23 Dk. Green	4.0	400	17.1	4.88	81.3	33 39
	4.5	448	17.4	5.18	86.3	34 40
	5.0	496	17.7	5.47	91.1	35 40
	5.5	552	18.3	5.78	96.3	35 40
	6.0	600	18.3	6.04	100.6	36 42
6.5	648	18.6	6.29	104.8	36 42	
 25 Dk. Blue*	4.0	400	17.7	5.23	87.1	33 39
	4.5	448	18.3	5.58	93.1	33 39
	5.0	496	18.9	5.92	98.7	33 38
	5.5	552	19.5	6.29	104.9	33 38
	6.0	600	19.8	6.60	110.0	34 39
6.5	648	20.1	6.90	115.1	34 39	
 28 Black	4.5	448	18.0	5.93	98.8	37 42
	5.0	496	18.3	6.21	103.5	37 43
	5.5	552	18.9	6.52	108.6	36 42
	6.0	600	19.5	6.77	112.8	36 41
	6.5	648	19.8	7.01	116.9	36 41
7.0	696	20.4	7.24	120.7	35 40	

* 5 standard nozzles included with each sprinkler.
Note: All precipitation rates calculated for 180 degree operation.
For the precipitation rate for a 360 degree sprinkler, divide by 2.

SPECIFICATIONBUILDER

MODEL	FEATURES	OPTIONS
I-25-04 = 10 cm (4") Pop-up	XX, XX-R, SS, SS-R, SS-HS, SS-HS-R	04-28 = Factory installed nozzle number
I-25-06 = 15 cm (6") Pop-up		B = BSP Inlet
		*Nozzle pack is supplied when no preinstalled nozzle has been specified.

▶ I-25-06 ▶ SS ▶ B

EXAMPLE  **I-25-06 - SS - B**

KEY TO FEATURES

- XX** = Adjustable arc, 50-360 degrees, plastic riser, with Check Valve
- XX-R** = Adjustable arc, 50-360 degrees, plastic riser, with Check Valve and reclaimed water ID
- SS-R** = Adjustable arc, 50-360 degrees, stainless riser, with Check Valve and reclaimed water ID
- SS-HS** = High Speed, ADJ arc, 50-360 degrees, stainless riser, with Check Valve
- SS-HS-R** = High Speed, ADJ arc, 50-360 degrees, stainless riser, with Check Valve and reclaimed water ID