


N°	NAME	MATERIAL		N°	NAME	MATERIAL		N°	NAME	MATERIAL	
1	BODY	BRASS-CW617N UNI EN12165	BRONZE-C83600 UNI EN1982	4	PLUG	BRASS-CW614N UNI EN12164		8	BOLT	BRASS-CW614N UNI EN12164	
		at 3/8" to 2"	at 2 1/2 to 3"			5	DISC			BRASS-CW617N UNI EN12165	
2	BONNET	BRASS-CW617N UNI EN12165	BRONZE-C83600 UNI EN1982	6	CAP			BRASS-CW614N UNI EN12164	BRONZE-C83600 UNI EN1982	10	-
		at 3/8" to 2"	at 2 1/2 to 3"			at 3/8" to 2"	at 2 1/2 to 3"	11	-		
3	SPRING	CARBON STEEL C72		7	NUT	BRASS-CW614N UNI EN12164				12	-

Working Temperature: -20° to 225°
 Max pression against: 1.033 Kg/cm²
 Setting: 1 to 12 Kg/cm²
 Hydraulic Test: 25 Kg/cm²

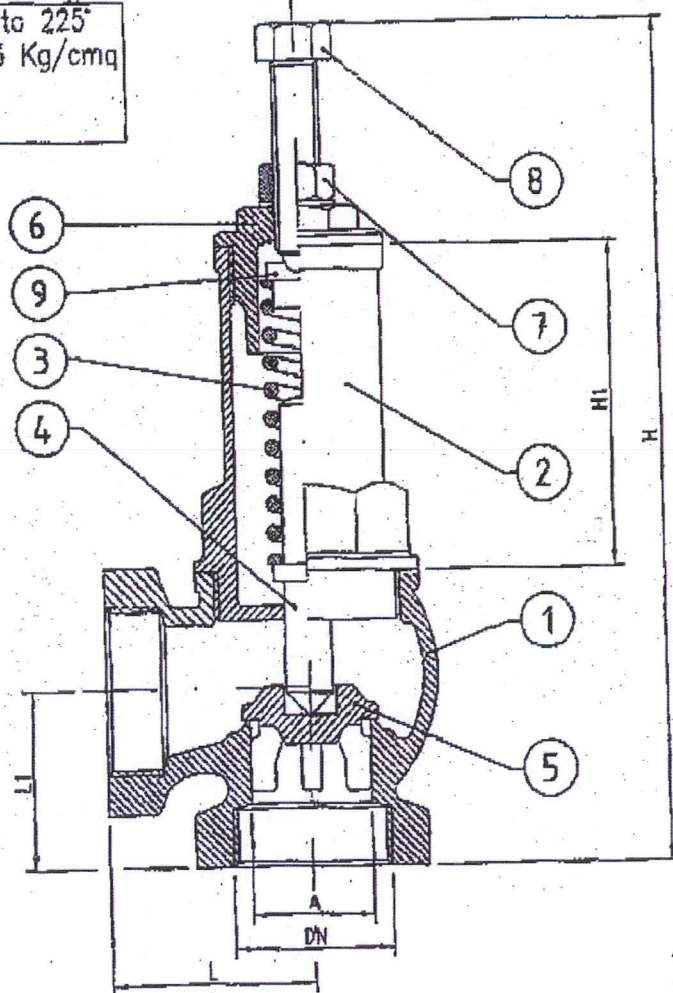

27-50
 Pressure
 relief
 Valves

MARK	Size	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
H mm		118	125	149	165	195	212	238	305	335
H1 mm		45	45	56	63	78	87	92	100	113
L mm		26	34	40	45	54	60	72	87	87.5
L1 mm		23.5	28.5	31.5	40	42.5	47	60	74.5	84
C mm		10	13	19	25.5	31	38	48	63.5	77

<p>CONTI RUBINETTERIE di Conti Giorgio & C. S.p.A. Via Astebino, 5 - 13018 Valduggia TELEFONO 0162 467704 FAX 0162 48107</p>	<p>SCALA /</p>	DISEGNATORE Simone Lanaro	MODIFICA: _____ _____ _____	FIRMA _____	DATA _____	
		DATA 05-12-2005		APP CONTI REV _____	M.V.	05-12-05
		RICEVATO DAL _____		APP CONTI REV _____	_____	_____
CODICE: VS190604	DESCRIZIONE: SAFETY VALVE PN16 SCREWED ENDS	N° DISEGNO _____	PAG. 1/1	REV. 00	_____	

A TERMINI DI LEGGE E' VIETATA LA RIPRODUZIONE O DIFFUSIONE DEL DISEGNO PREVIA NOSTRA AUTORIZZAZIONE.